

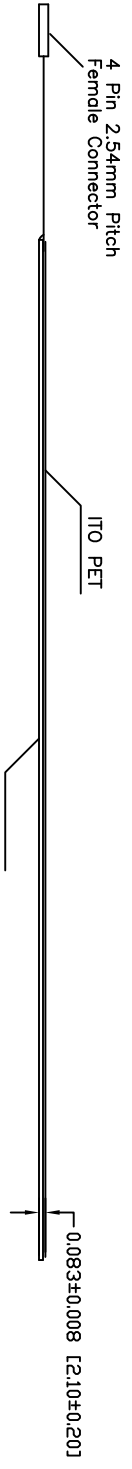


REV	INITIALS	DATE	DESCRIPTION

3.000±0.050 [76.20±1.27]	0.402 [10.20]	12.992 [330.00] OVERALL	0.510 [12.95]
	0.449 [11.40]	12.228 [310.60] SPACER OPENING	0.431 [10.95]
	0.531 [13.50]	12.134 [308.20] VIEWABLE AREA	0.400 [10.15]
		11.972 [304.10] ACTIVE AREA	

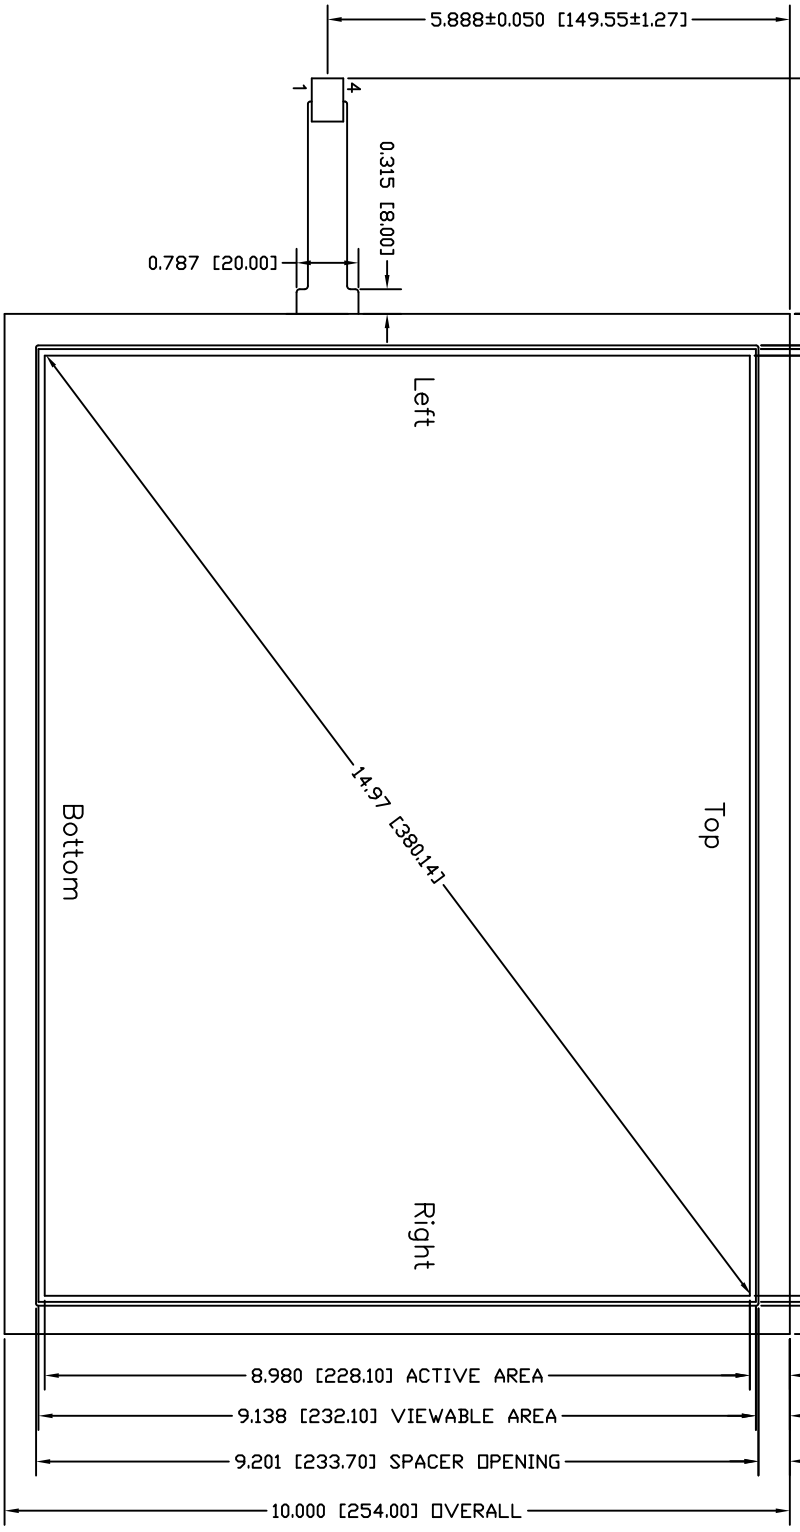

- NOTES:
1. TOLERANCE ±.020 UNLESS NOTED OTHERWISE.
 2. TOP CONDUCTIVE LAYER TO HAVE AN ANTI-GLARE HARDCOATED SURFACE.
 3. PIN ONE IS DESIGNATED BY THE NUMERICAL NUMBER 1 BY CONNECTOR END.
 4. PINDOUT TO BE AS INDICATED.
 5. TAIL TYPE: HSC WITH AMP PLAIN HOUSING OR EQUIVALENT.



BERGQUIST TOUCH PRODUCTS			
300 WASHINGTON STREET			
CANNON FALLS, MN 55005			
TITLE: 1497 DIAGONAL 4-WIRE			
ROHS COMPLIANT			
DRN: MLR	DATE: 6/2/08	TOL: ±0.020	DWG # 9102E
CHKD:	DATE:	PART #:	REV
APVD:		400433	