



RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

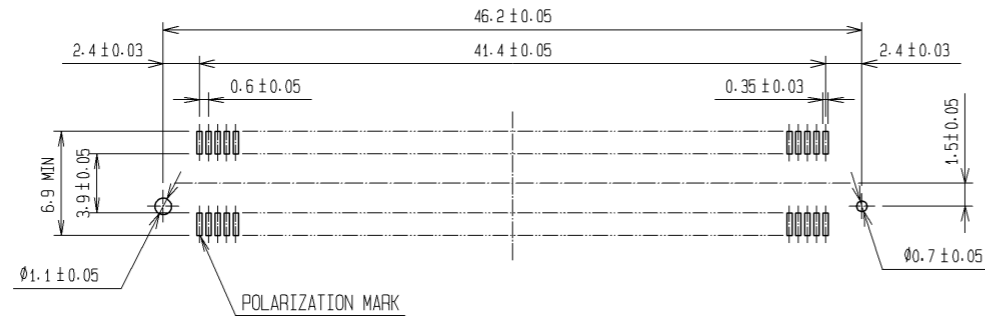

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min. LEAD AREA:TIN PLATING 1μm min.	4	POLYVINYL CHLORIDE (STOPPER)	
1	PPS	UNDER PLATING:NICKEL 1μm min. LIGHT BROWN (UL94V-0)	3	POLYVINYL CHLORIDE (TUBE)	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		5 : 1		DESIGNED	CHECKED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	10.07.02	DRAWING NO. EDC3-150573-24	
		CHECKED : HT. YAMAGUCHI	10.07.02	PART NO. FX8-140P-SV1(91)	
		DESIGNED : SY. KAMIGA	10.07.01	CODE NO. CL578-0047-7-91	
		DRAWN : HK. SUNADORI	10.07.01		

DRAWING FOR PACKING(FREE)

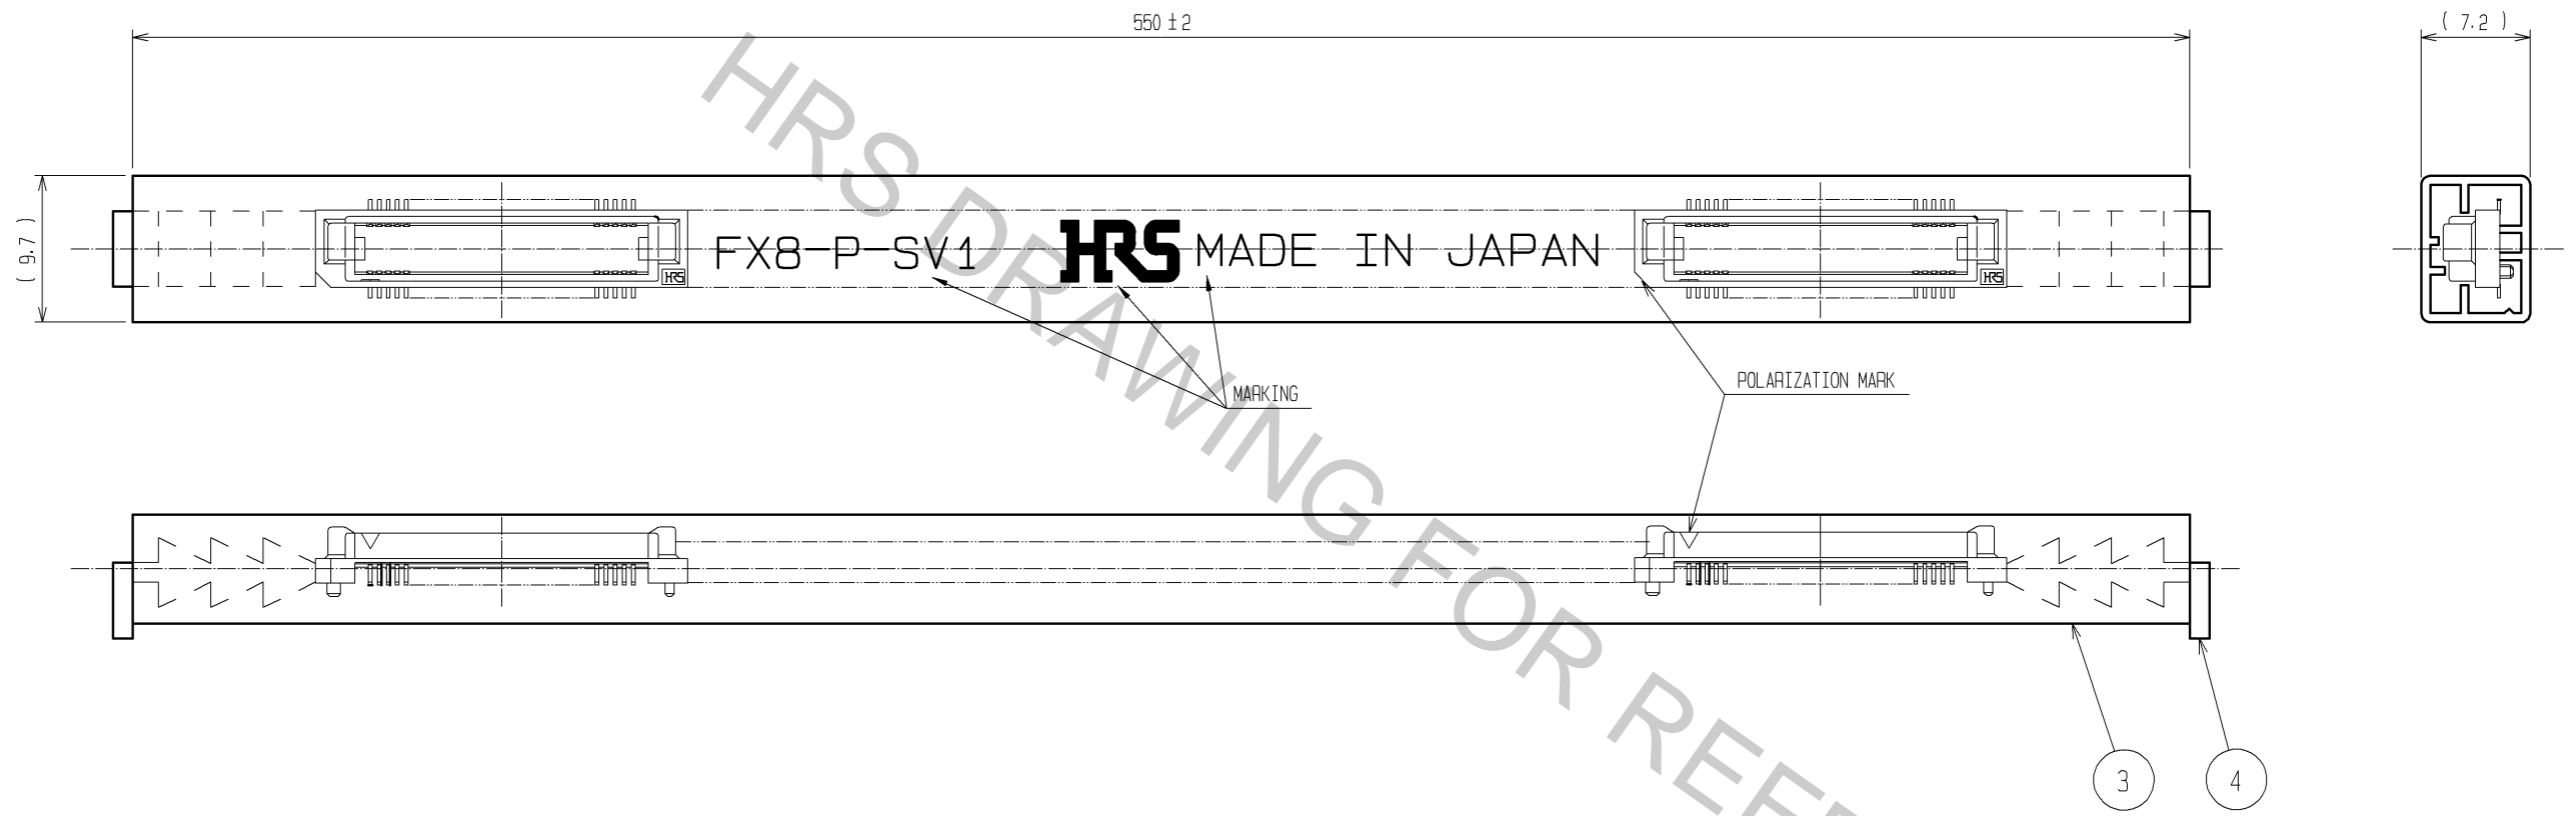

NOTE 1. 1 TUBE : 10 CONNECTORS.
 2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS	DRAWING NO.	EDC3-150573-24
	PART NO.	FX8-140P-SV1(91)
	CODE NO.	CL578-0047-7-91
		△ 2/2